

TAPING MACHINE SERIES

PME-1648

Two-spindle rotating taping machine for transformers

Two rotating spindles

A two-spindle rotating taping machine for EE and EI transformers and ferrite parts, with adjustable pitch, taping position, tension and number of turns.

1 pc / 2 s
WORKING SPEED

34-77 mm
TAPE INNER HOLE

25-85 mm
SPINDLE PITCH


45 kg
MACHINE WEIGHT

KEY FEATURES


- **Tape inner hole 34-77 mm**
Takes tape rolls with an inner hole between 34 mm and 77 mm.
- **Ferrite taping**
Also suitable for ferrite taping applications.
- **Adjustable taping**
Taping position, tension force and number of turns can all be adjusted.

- **Wide transformer range**
PME-1648: EE10-35; PME-1648A: EE25-48; PME-1648B: EI35-66.
- **Two rotating spindles**
Two-spindle rotating taping, with pitch adjustable from 25 mm to 85 mm.
- **Quick changeover**
A simple mold change adapts the machine to different components.

PME-1648

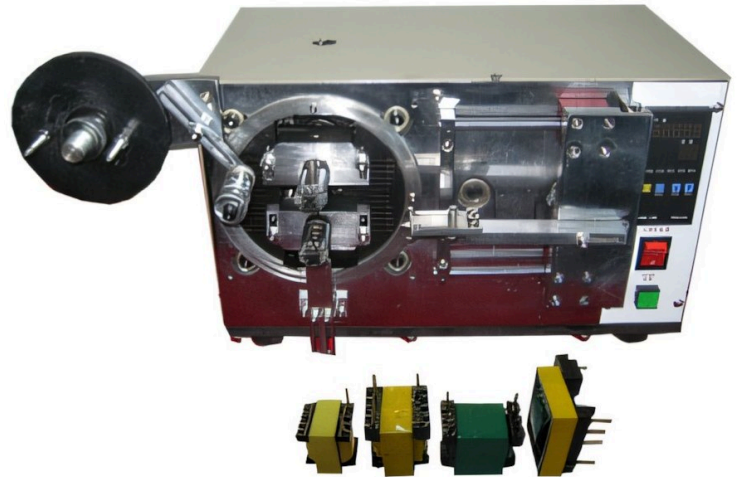

PME-1648B

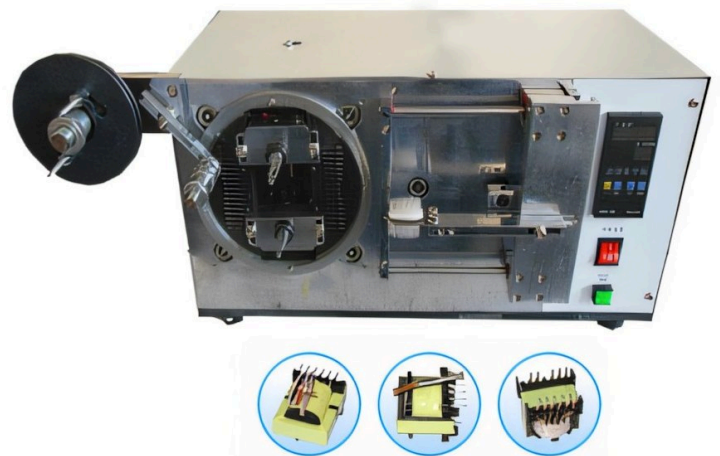

SPECIFICATIONS

MODEL PME-1648	
Working speed	1 pc / 2 s
Power	AC 220 V, 50/60 Hz
Dimensions	L250 × W550 × H300 mm
Weight	45 kg

Specifications and design are subject to change without notice.

TYPICAL PRODUCTS

