


^ LAMINATION PAD MACHINE SERIES

PME- EI / UI

For EI / UI silicon-steel lamination pads

22 models, E-19 to EI-171

For EI and UI silicon-steel lamination pads: EI pads are not pulled back, which raises productivity and working efficiency and reduces bad silicon-steel pads. Offered in 22 sizes.

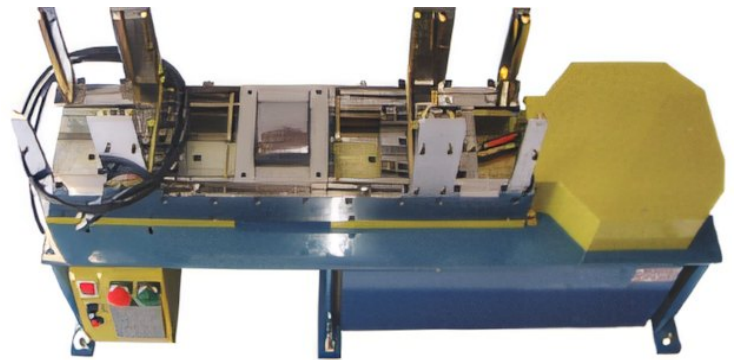

22
MODELS

19-171 mm
X SIZE RANGE

12.5-142.5 mm
Y SIZE RANGE

320-400 pcs/min
SPEED, EI-28 TO EI-171

KEY FEATURES

^ No pull-back of EI pads

EI pads are not pulled back.

^ Fewer bad pads

Reduces the rate of bad silicon-steel pads.

^ Motor and speed by size

40 W and 60 W models run at 400 pcs/min; 1/2 HP models at 320 pcs/min.

^ Higher productivity

Raises productivity and working efficiency.

^ 22 sizes


Models from E-19 to EI-171, with X from 19 to 171 mm and Y from 12.5 to 142.5 mm.

SPECIFICATIONS


MODEL	X (MM)	Y (MM)	MOTOR POWER	SPEED (PCS/MIN)
E-19	19	12.5	—	—
E-24	24	15	—	—
E-26	26	16	—	—
EI-28	28	25.2	40 W	400
EI-35	35	29.5	40 W	400
EI-41	41	33	40 W	400
EI-48	48	40	40 W	400
EI-54	54	45	60 W	400
EI-57	57	47.5	60 W	400
EI-60	60	50	60 W	400
EI-66	66	55	60 W	400
EI-76.2	76.2	63.5	60 W	400
EI-78	78	65	60 W	400
EI-85.8	85.8	71.5	60 W	400
EI-95	95	82.5	1/2 HP	320
EI-96	96	80	1/2 HP	320
EI-102	102	89	1/2 HP	320
EI-105	105	87.5	1/2 HP	320
EI-111	111	96.5	1/2 HP	320
EI-120	120	100	1/2 HP	320
EI-130	130	113	1/2 HP	320
EI-171	171	142.5	1/2 HP	320

Specifications and design are subject to change without notice.


TYPES

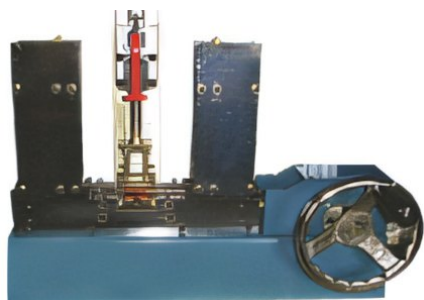

EI manual type

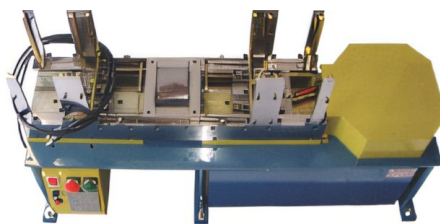

EI auto motor type

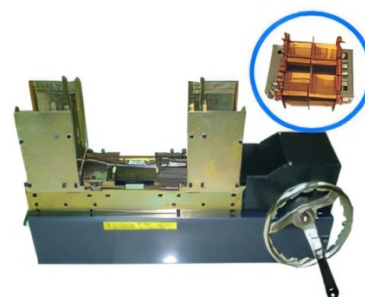

UI manual type